


GENERAL NOTES:

The weight of the armor bolts, non-loading webbers and heavy armor nuts for bearing are included in the weight of the reinforced structural steel.


0.8176

 Indicates machine finish surface.


① **FORGED LUB-LOUNT**
A lub-lount coating shall be applied to the shoe to both protect the shoe from the bearing assembly. The lub-lount, method of oiling, and application shall meet the requirements of MIL-L-2338 and MIL-L-6647. The coated areas shall be protected for shipping and erection.
Shoe drawings are not required for the lead plates and the preformed lead pads.

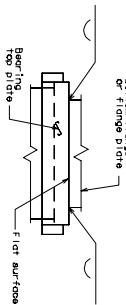


WELDING DETAILS




END VIEW OF WEB



DETAIL FOR 3/4" Ø
THRU 2-1/2" ANCHOR BOLTS

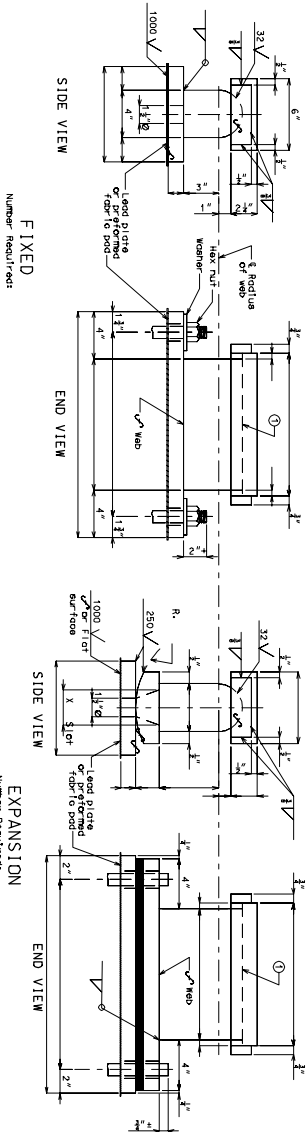

OPTIONAL DETAIL FOR 1-3/8" Ø
THRU 2-1/2" Ø ANCHOR BOLTS



SWEDGE ANCHOR BOLT DETAILS

TYPE "E" BEARINGS

(Estimated weight pounds)

Detailed
Checked

Note: This drawing is not to scale. Follow dimensions.

Shoot No. of

T:\br-proj\A-stalib-english-after-06-04-jetting\Bearings-BRG\inwork\brg03-typee-st.dgn 12:27:09 PM 06/18/2004

COUNTY	BRG 3
--------	-------

CREATED IN
MICROSTATION